


Description: The BKO doorframe consists of an anodised aluminium profile. This aluminium reveal piece is placed centrally to the wall thickness 'between' the fully finished reveal. Therefore, after door installation, this aluminium reveal piece remains visible in the reveal as a 25 mm edge around the door leaf. Mounting is done on a smooth, level-finished reveal side or wall with a view to rubber anti-vibration mats and is screwed to the latter, and finished with a sealant joint that can be painted, which is finished straight and square. The door leaf and the pivot hinge parts are fully and solely anchored in the aluminium reveal piece. BKO is possible for a burglar-resistant door unit but not for a fire-retardant application.

(!) BKO is possible in all constructional situations.

See also TFWAS-BKO, TFDLB-..., TFKIW, IFOPM-gen.

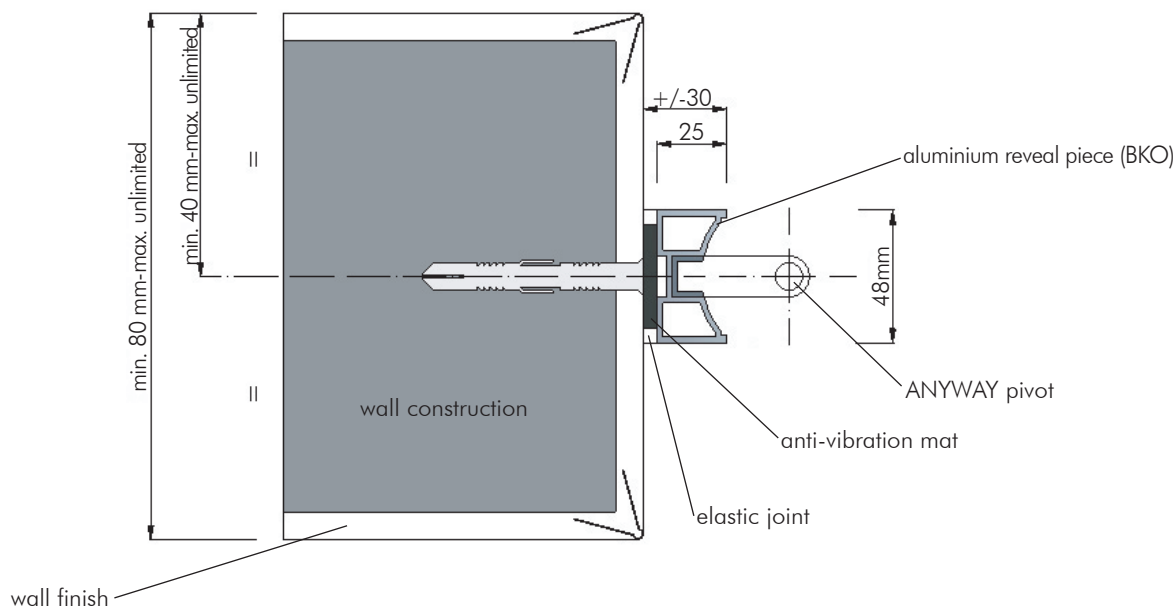

Practical points:

- reveal sides: - solid wall construction or with wood-reinforced system or metal stud walls, with fully even and in plumb plastered or finished reveals
- reveal dimensions: - minimum, maximum or ideal dimensions depend on the door type (see TFDLB-etc.), the minimum wall thickness is 80 mm
- walls: - fully finished including reveals
- floors: - continuous, central separation or intermediate threshold, everything at the same level and levelled
- plinths: - built-on plinths up to the aluminium reveal piece after installation, max. 25 mm thick. Built-in plinths are always possible (even beforehand) and anywhere.
- constructional divergences lead to additional costs , e.g. sawing out reveal pieces or door casings, narrowing door casings, fill-in lath, etc.

Measurement: (in 1 go)

- walls and reveal sides completely plastered or finished, floors installed
- wall tiles etc. are in place or finishing thicknesses are known
- dimensions supplied and/or not measurable have to be confirmed in writing. Because of its customised production, ANYWAY takes no responsibility whatsoever for dimensions not measured by ANYWAY.

User tips:

- turning direction and hinge side remain adjustable, except in case of bullet and burglar-resistant doors
- ANYWAY doors need to be used responsibly because of the potentially enormous leverage forces that opening or closing doors transmit to the pivot hinges, door leaf and wall anchoring, etc. With DLIBO doorframes, this may result in cracks in the wall finish!
- maintenance and aftercare (see IFOND)



ANYWAYDOORS.com

Moderne binnendeuren-Portes intérieures modernes-Moderne Innentüren-Modern interior doors

B : Massenhoven
T : +32[0]3.475.15.15
F : +32[0]3.475.14.75
E : info@anyway.be

NL: Heerlen
T : +31[0]45.563.52.22
F : +31[0]45.521.78.85
E : info@anywayheerlen.nl